


Art 411

Raccoglitore di impurità a "Y" in bronzo per liquidi

Bronze "Y" pattern filter for liquids

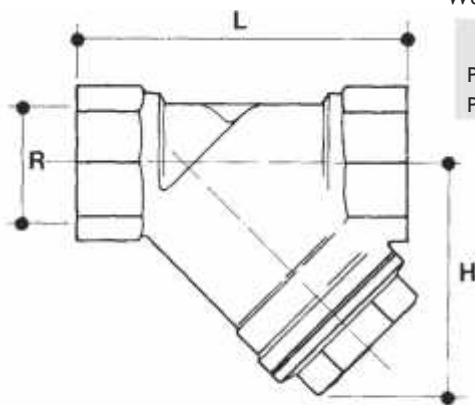

Pressioni di esercizio a max 80°C
Working pressures at 80°C max

R"	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
PN 20	●	●	●	●	●	●	●	●	●	●
PN 16	○	○	○	○	○	○	○	○	○	○

Dimensioni principali

Leading dimensions

DN	10	15	20	25	32	40	50	65	80	100
R"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L	55	58	70	87	96	106	126	145	165	215
H	40	40	50	60	68	75	90	100	118	170

*UDGR GL ÅOWUDJLRQH

Filtering rate

μ	400	400	400	400	500	500	500	600	600	600
---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Perdite di carico

Pressure drop

R"	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Kv	3,4	4,6	7,3	12,5	17	24,5	36	60	80	100


R"	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
----	-----	-----	-----	---	-------	-------	---	-------	---	---

Box	20	20	12	10	10	5	2	-	-	-
-----	----	----	----	----	----	---	---	---	---	---

Art 412

Raccoglitore di impurità a "Y" in ottone per liquidi

Месинг "Y"

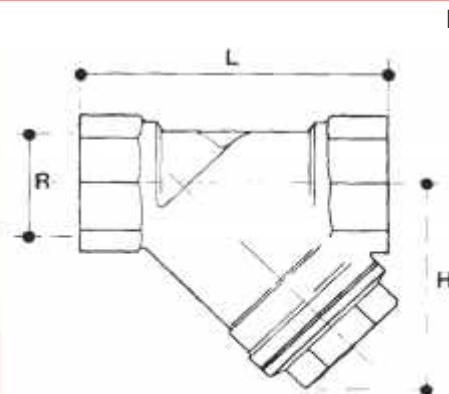

Pressioni di esercizio a max 80°C
80°C max

R"	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
PN 20	●	●	●	●	●	●	●	●	●	●
PN 16	○	○	○	○	○	○	○	○	○	○

Dimensioni principali

DN	8	10	15	20	25	32	40	50	65	80
R"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2 1/2"	3"
L	55	55	58	70	87	96	106	126	145	165
H	40	40	40	50	60	68	75	90	100	118

*UDGR GL ÅOWUDJLRQH

μ	400	400	400	400	400	500	500	500	600	600
---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Perdite di carico

R"	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
Kv	1,821	3,428	4,477	7,857	11,08	17,00	24,50	36,00	60	80

R"	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
----	-----	-----	-----	-----	---	-------	-------	---	-------	---

Box	20	20	20	20	10	10	5	2	-	-
-----	----	----	----	----	----	----	---	---	---	---