


BILIGHT MODELI SA DVE SERPENTINE

GCV7/4S2 120 44 20 B11
TSRCP



| | BiLight 120 S2 |
|---|------------------------|
| Neto zapremina | 115 L |
| Nazivna snaga | 2000 W |
| Energetska klasa | C |
| Prečnik | 440 mm |
| Vreme zagrevanja Δt 45K (15 - 60°C)**80°C | 0:38/0:54 h:min |
| Visina | 1.150 m |
| Širina | 0.440 m |
| Dubina | 0.467 m |
| Čaura senzora toplote | x1 pieces |
| Površina serpentine | 0.5/0.3 m ² |

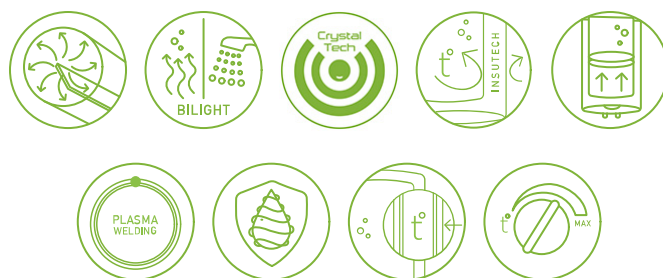

| | |
|---|-------------|
| Zapremina serpentine | 2.4/1.4 L |
| Maksimalan protok sanitarne vruće vode kod ΔT 35 $^{\circ}$ C *60-80 $^{\circ}$ C | 330/201 L/h |
| Maksimalna snaga serpentine *60-80 $^{\circ}$ C | 13.4/8.1 kW |
| Statički gubici | 85 W |